


## TL-CABLE01S

**product description**

Innovative product design, easy installation, self-locking device, current carrying capacity, excellent sealing performance dust and water. Can choose a variety of OD cables.



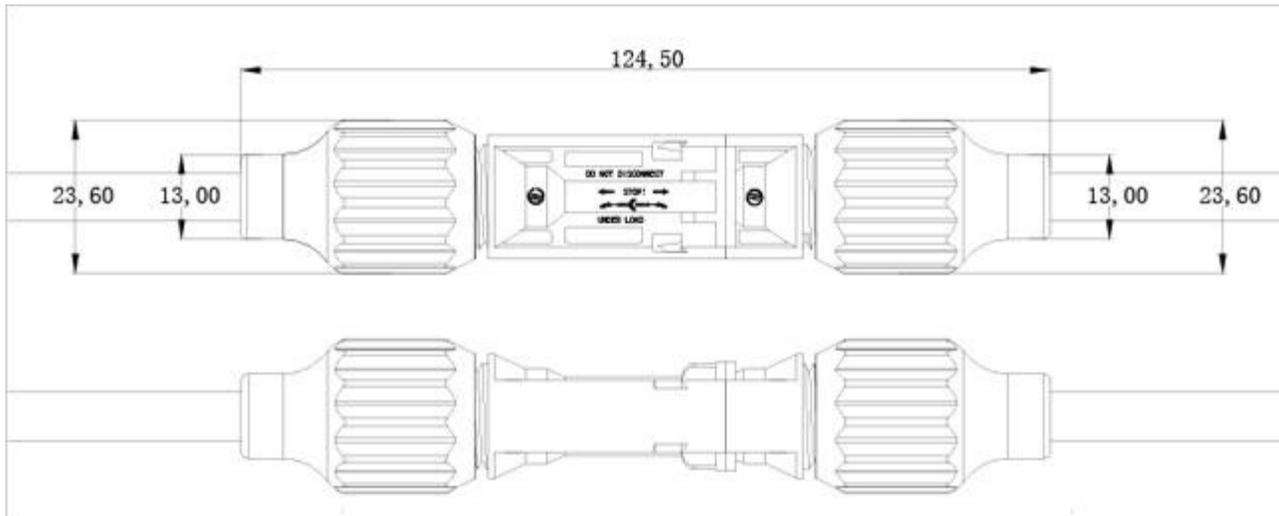

Test / specification model

TL-CABLE01S

Rated voltage

1500V

Rated current

30A

Number of terminals

/

Operating temperature

-40 °C - 85 °C

Security Level

/

Degree of protection

IP 68

Cable specifications

4mm<sup>2</sup>

Metal terminal material

Copper tin

Flammability rating

UL94-V0

Contact resistance

≤ 0.3mΩ